



1650/1850MHz Diplexer

Specification

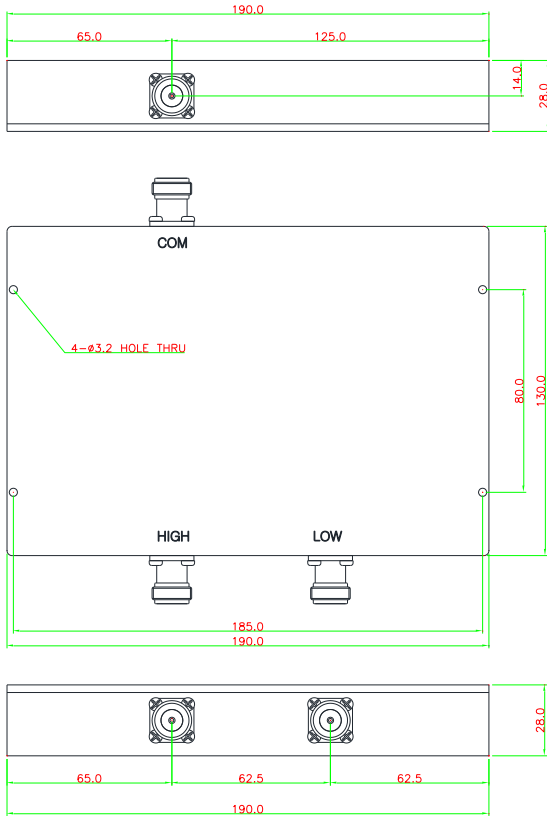


Items	Specification	
Pass band Frequency	1100 ~ 1650MHz	1850 ~ 2700MHz
Insertion Loss	0.5dB Max	
Return Loss	15dB Min	
Isolation	30dB Min	
Connector	N	
Impedance	50 Ω	
Operating Temperature	-40°C ~ +70°C	
Dimension (WxDxH)	190.0 X 130.0 X 28.0 mm	
Power Input	100W Max	

Measurement Data

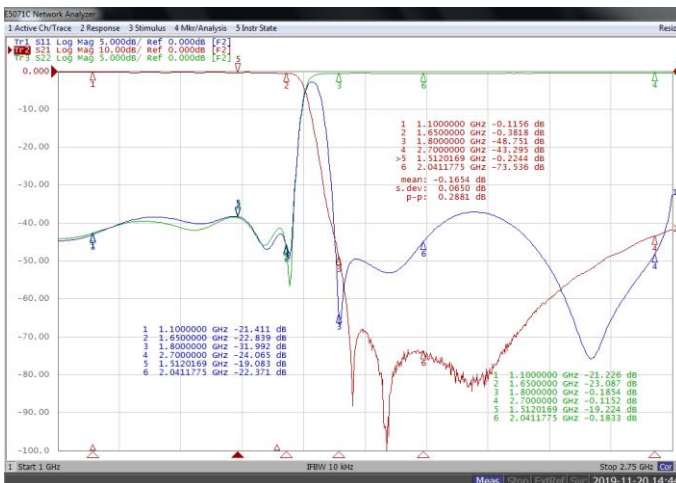

< Insertion Loss / Return Loss measurement >

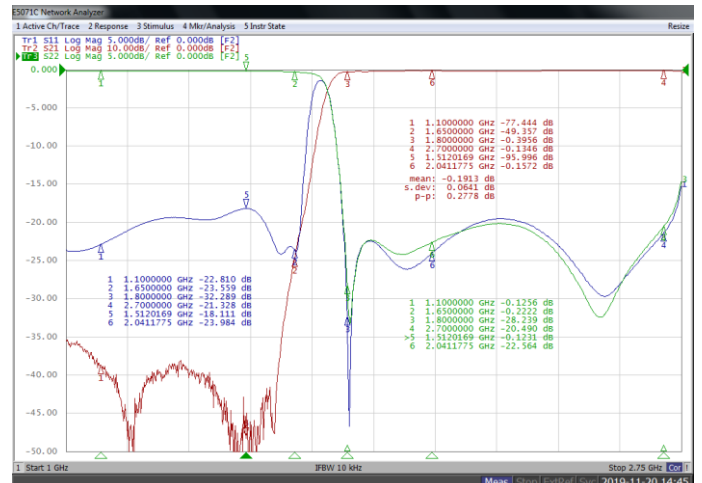

< Insertion Loss / Return Loss measurement >