



# 450~520MHz Band Pass Filter

## Specification

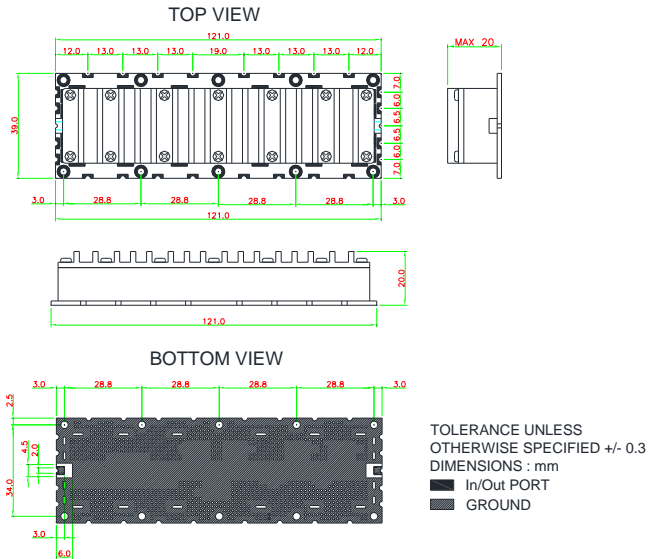


Items	Specification
Pass band Frequency	450 ~ 520MHz
Insertion Loss	1.0dB Max
VSWR	1.5:1
Rejection	40dB Min @350MHz 10dB Min @400MHz 10dB Min @570MHz 30dB Min @620MHz 70dB Min @1000~2500MHz 50dB Min @2500~6000MHz 80dB Min @1573~1577MHz
Connector	SMD
Impedance	50 Ω
Operating Temperature	-30°C ~ +70°C
Dimension (WxDxH)	121.0 X 39.0 X 20.0 mm
Power Input	130W Max

## Measurement Data

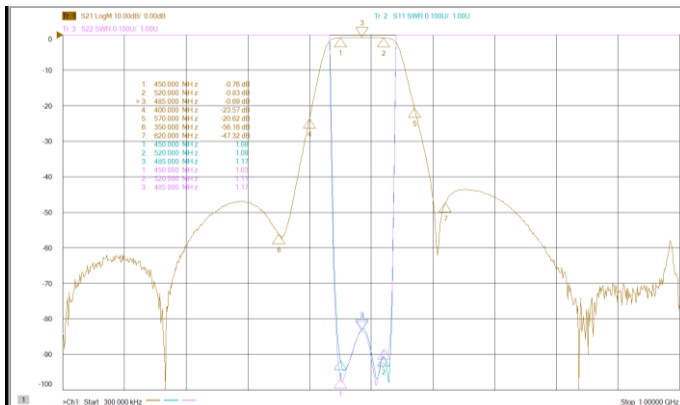

< Insertion Loss / Return Loss measurement >

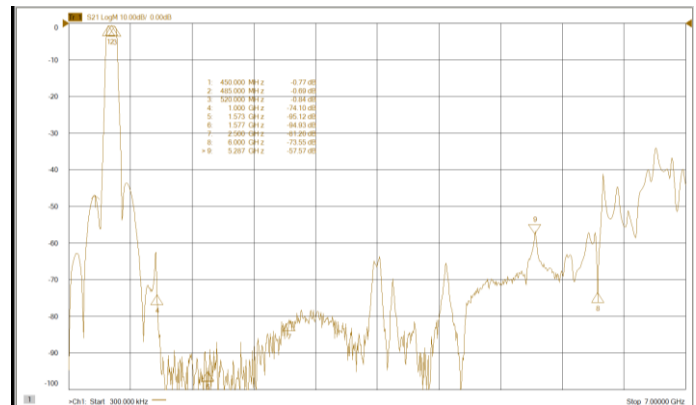

< Rejection measurement >