



500~2160MHz Band Pass Filter

Specification

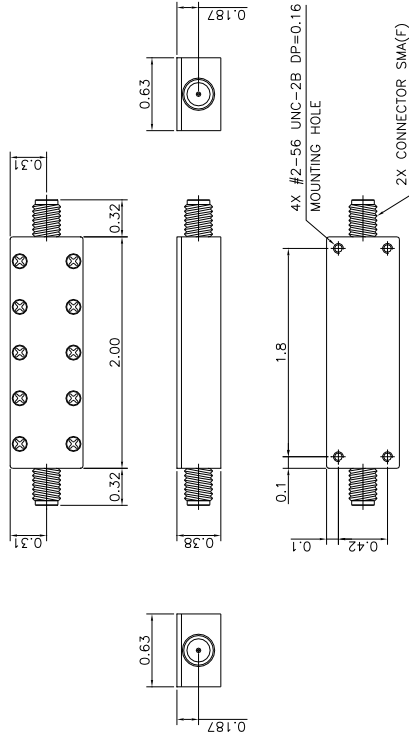

Items	Specification
Pass band Frequency	500~2160MHz
Insertion Loss	2.0dB Max
VSWR	2 : 1
Rejection	60dB Min @ DC~400MHz 60dB Min @ 2400~14000MHz 50dB Min @ 14000~18000MHz
Connector	SMA
Impedance	50 Ω
Operating Temperature	-33°C ~ +65°C
Dimension (WxDxH)	2.0 X 0.63 X 0.38 in
Power Input	2W Max

Measurement Data

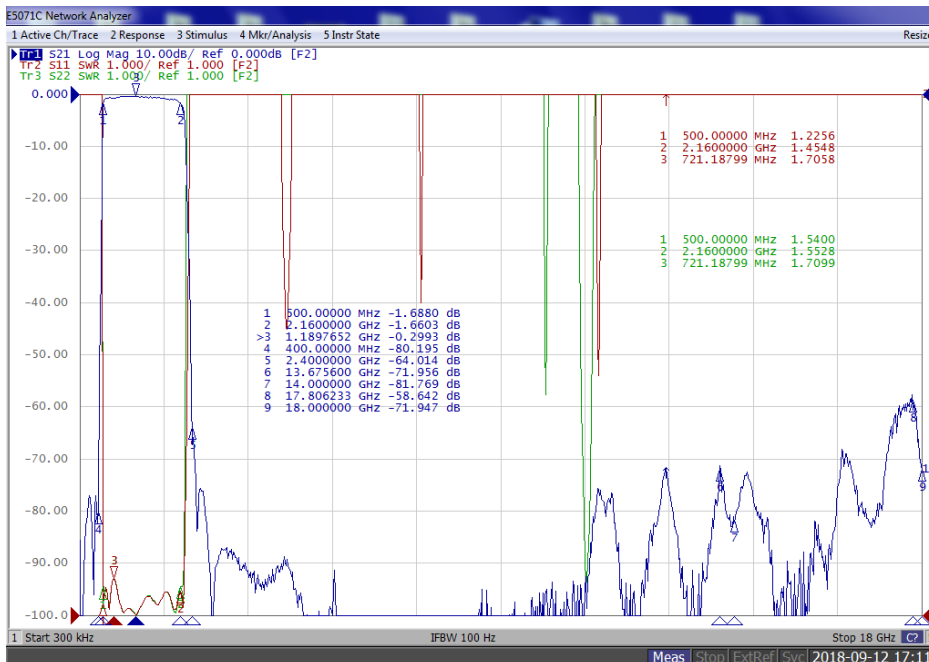

< Insertion Loss / Return Loss measurement >